

Bind solo



6660

Design By undefined

VIBIA

Bind Solo provides accent down light via a surface mounted fitting. The angle of aperture creates high contrasts over long distances.

Model Sheet

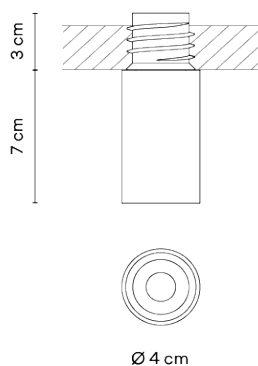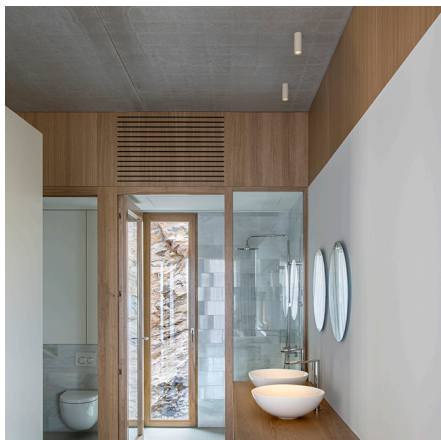

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

24 Beige M1
test ral

LED

2700 K / 3000 K / 3500 K

Control

PUSH DALI / On / Off / CASAMBI

Electrical connection Remote driver Built-in Micro

Light source

1 x LED 5,2W 300mA



LED

CRI>90 530 lm 101,9
2700 K / 3000 K / 3500 K

Driver

Constant Current 300 mA 220~240
V 50/60 Hz

□ F IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.15 m x 0.15 m x 0.075 m
Gross weight 0.72 kg
Net weight 0.24 kg
Vol. 0.0016 m³



Lighting effect

Narrow Accent Downlight

Angles less than 20°. Suitable for generating high contrasts or projections from far away.



Photometric Data

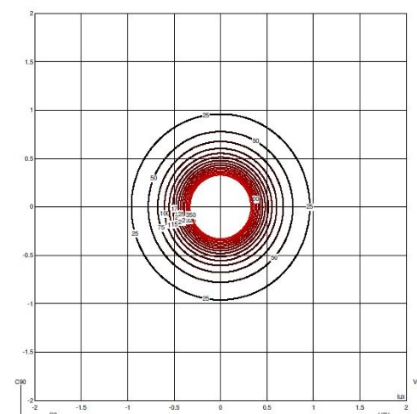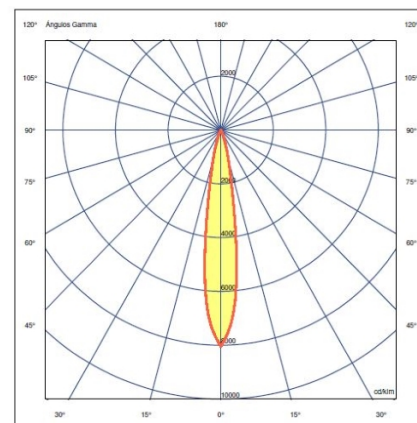

Efficiency
Coordinate System
Total Flux
Maximum Value

90.928 lm/W
CG
491.0 lm
8039.76 cd/klm

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty