






Model Sheet

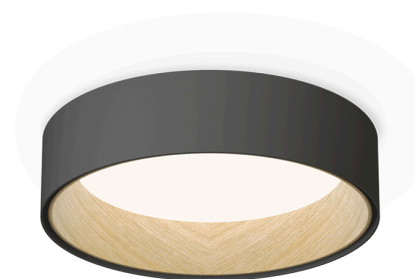

Finish

-  93 White
RAL 9016
-  58 Cream
RAL 7044
-  18 Graphite
ADAPTA RF 9913 WX

LED temperature color

2700 K / 3500 K / 4000 K

Dimming

Push; 1-10V; DALI-2 / Casambi

Installation type

Surface Canopy

Materials

Shade: Wood

Light source

1 x LED PLATE 26W 500mA



LED

CRI>90 2206 lm 98
2700 K / 3500 K / 4000 K

Driver

Constant Current 500 110~240
V V 50~60 Hz HZ



Dimmable

IP20

Bi-volt

50-60Hz

Application

Ceiling Lamps


Packaging

1 Box
0.558 m x 0.558 m x 0.255 m
Gross weight 7
Net weight 6
Vol. 0.0793



Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

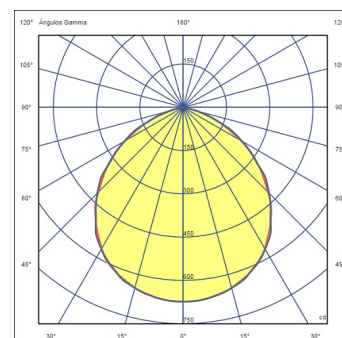

Other Applications

