


## Model Sheet

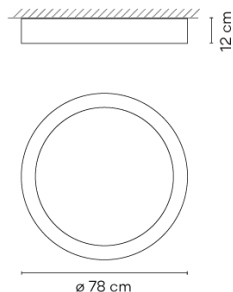

Finish	18 Graphite ADAPTA RF 9913 WX
	58 Cream RAL 7044
	93 White RAL 9016
LED temperature color	2700 K / 3500 K / 4000 K
Dimming	Push; 1-10V; DALI-2 / Casambi

Installation type Surface Canopy

Materials	Shade: Wood
Light source	1 x LED PLATE 46W 500mA F
LED	CR>90 3958.8 lm 98 2700 K / 3500 K / 4000 K
Driver	Constant Current 500 110~240 V V 50~60 Hz HZ




Application	Ceiling Lamps
Packaging	1 Box 0.896 m x 0.882 m x 0.249 m Gross weight 24.1 Net weight 17 Vol. 0.1967



### Lighting effect

#### General lighting

Lamp for general lighting that equally distributes the light in all directions.



### Photometric Data

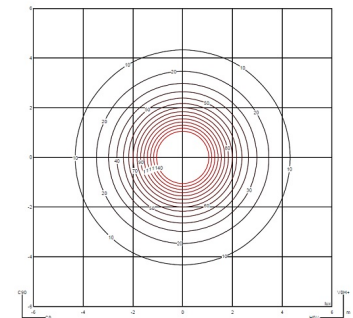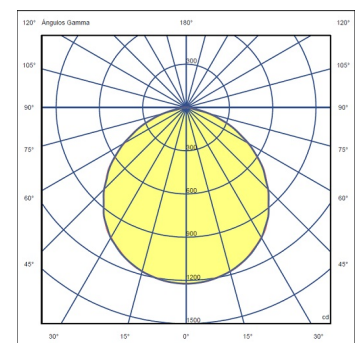

### Other Applications

