

Bind solo



6610

Design By undefined

VIBIA

Bind Solo provides downwards accent lighting via a surfaced mounted fitting. The angle of aperture allows for the creation of high contrasts over long distances.

Model Sheet

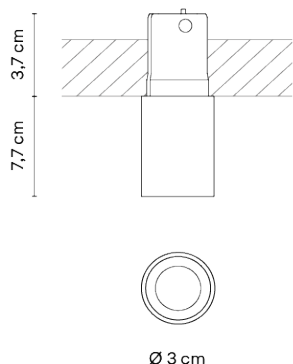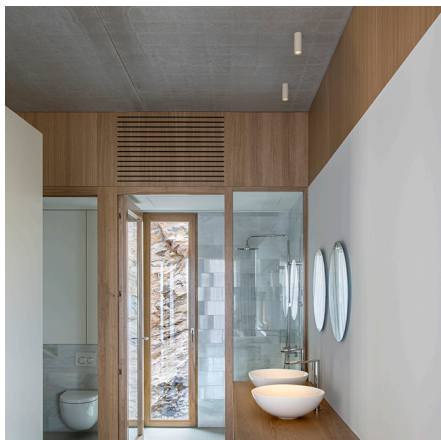

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

24 Beige M1
test ral

LED

2700 K / 3000 K / 3500 K

Control

PUSH DALI / CASAMBI / On / Off

Electrical connection Remote driver Built-in Micro

Light source

1 x LED 4.3W 250 mA




LED

CRI>90 451 lm 104,9
2700 K / 3000 K / 3500 K

Driver

Constant Current 250 mA 220~240 V
50/60 Hz



Application

Ceiling


Packaging

1 Box
0.15 m x 0.15 m x 0.075 m
Gross weight 0.66 kg
Net weight 0.18 kg
Vol. 0.0016 m3



Lighting effect

Narrow Accent Downlight

Angles less than 20°. Suitable for generating high contrasts or projections from far away.



Photometric Data

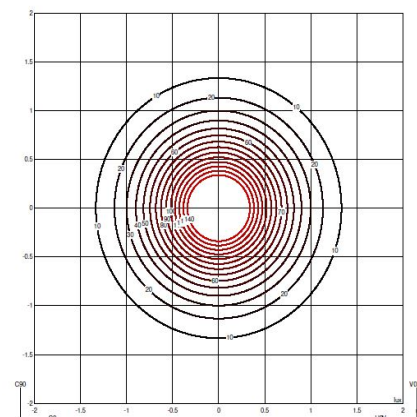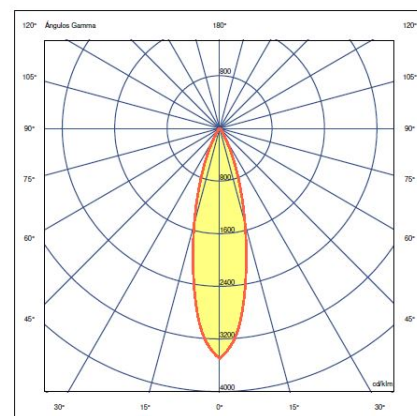

Efficiency

75.909 lm/W

Coordinate System

CG

Total Flux

334.0 lm

Maximum Value

3500.41 cd/klm

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

customer.service@vibia.com
vibia.com